



Atlas Copco

Complete submersible dewatering solutions

The WEDA range (60 Hz)

WEDA dewatering pumps

WEDA electric submersible pumps and accessories are designed for an extensive range of dewatering applications, across multiple industries. They provide the performance, reliability and ease of use you need. WEDA pumps feature a built-in starter and motor protection system along with optional automatic level control. Adjustable wear-resistant rubber diffusers and hardened high-chrome impellers ensure durability in tough environments.

At Atlas Copco, we understand pumps, their applications and, most importantly, the people using them. We have a complete range of high-quality and lightweight electric submersible pumps designed specifically for drainage, sludge and slurry pumping applications and available in global voltages.

WEDA pumps are made for durability. The unique sealing system and modular design make them among the most flexible pumps on the market. Easy to use and maintain, WEDA pumps promise optimal performance. The WEDA seal system is designed to provide the optimum maintenance solution and can be easily fitted at the job site.



**SPECIFIC
GRAVITY
UP TO 1.7**



**SOLIDS
HANDLING
UP TO 2.5 inch**



**UP TO
40%
LIGHTER
IN WEIGHT**



**HIGH WEAR
RESISTANCE**



There is a WEDA pump for any dewatering application

We understand the dewatering needs of our customers, which vary with location and application. Accordingly our submersible range is developed for drainage (D), sludge (S) and slurry (L) applications.

These applications call for pumps designed specifically for handling corrosive and abrasive media and their solid contents.

Drainage pumps (WEDA D)



Sludge pumps (WEDA S)



Slurry pumps (WEDA L)



SPECIFIC
GRAVITY
UP TO **1.1**

SPECIFIC
GRAVITY
UP TO **1.4**

SPECIFIC
GRAVITY
UP TO **1.7**

DESIGN
TOP
DISCHARGE

DESIGN
BOTTOM SIDE
DISCHARGE

DESIGN
BOTTOM SIDE AND
TOP DISCHARGE

SOLIDS
HANDLING
UP TO **0.5** inch

SOLIDS
HANDLING
UP TO **2** inch

SOLIDS
HANDLING
UP TO **2.5** inch

pH VALUES
FROM **5** TO **8**

pH VALUES
FROM **5** TO **8**

pH VALUES
FROM **2** TO **10**

Applications

- General dewatering
- Ground water
- Raw water
- Construction sites
- Water containing mud
- Sludge or light slurry
- Tank clean-out
- Trench and pond cleaning
- Mining
- Abrasive media with high solids content
- Quarries
- Dredging
- Settling ponds

WEDA D range

The WEDA drainage pumps handle either clean or dirty water, even with small solids with the best performance and efficiency.

HIGH CORROSION RESISTANCE

Unique aluminum alloy offers the perfect combination of strength, light weight and corrosion resistance

FLEXIBILITY

Discharges can be mounted vertically or sideways as required

MOTOR PROTECTION

Class F motors, with thermal switches in each winding

EXTENDED PERFORMANCE

Pump design ensures all-round motor cooling for better performance

WEDA+

1. Rotation control
2. Phase failure protection
3. Thermal switches
4. Phase shifter plugs for three-phase pumps
5. Eliminates the need for external starter



IMPROVED CABLE SEALING

Ensures protection against water leakage from cable entry


MODULAR SEALING SOLUTION

Based on pump size, the sealing system is adapted to provide the best solution

IMPROVED WEAR RESISTANCE

High-chrome (55HRC) impellers provide higher wear resistance

55 
HRC

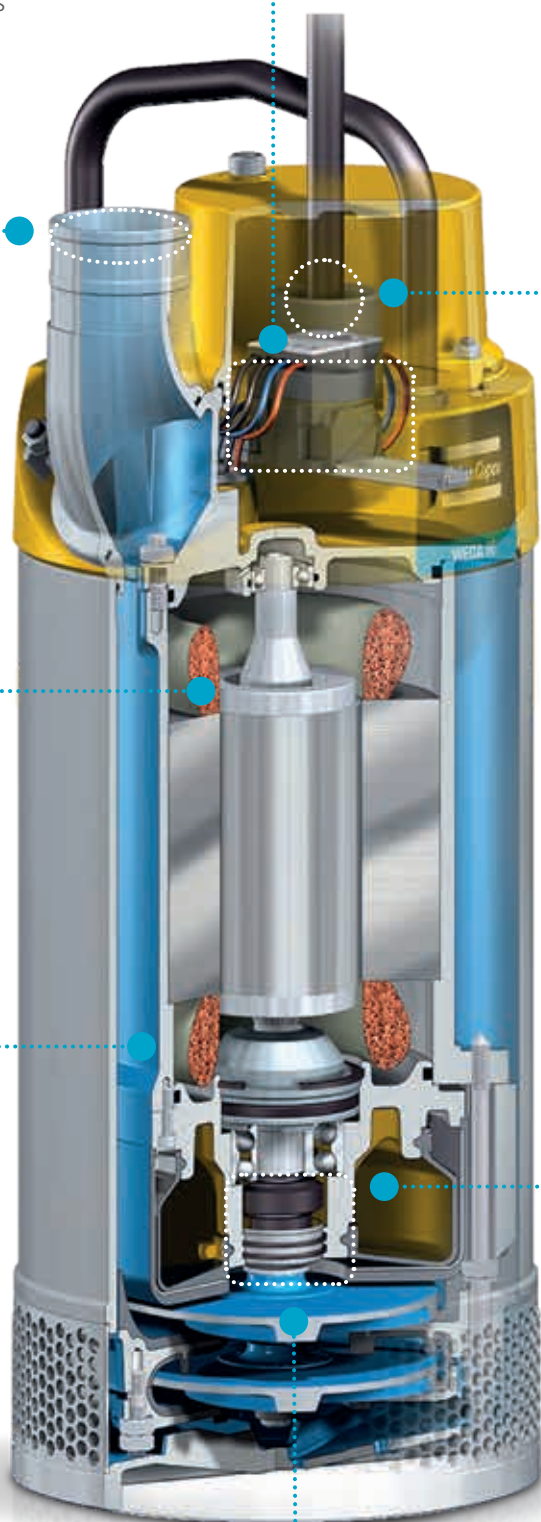

WEDA S range

The WEDA sludge pumps can handle thick, soft, wet mud or other similarly viscous mixtures of liquids and solids, especially the product of an industrial or refining process.

IMPROVED CABLE SEALING

Ensures protection against water leakage from cable entry

DRY RUNNING CAPABILITIES

Improved rib design offers external cooling to motor for extended running time

MOTOR PROTECTION

Class F motors, with thermal switches in each winding

HIGHER SOLIDS HANDLING

Sludge pumps can handle solids up to 2 inch

**SOLIDS
HANDLING**
UP TO **2** inch

ROBUST DESIGN

Base of the pump ensures stability while enabling passage of large solids

WEDA+

1. Rotation control
2. Phase failure protection
3. Thermal switches
4. Phase shifter plugs for three-phase pumps
5. Eliminates the need for external starter



EASY INSPECTION

External oil inspection plug for quick inspection of oil

MODULAR SEALING SOLUTION

Based on pump size, the sealing system is adapted to provide the best solution


SUSTAINABLE PERFORMANCE

High-chrome (55HRC) impellers provide higher wear resistance

55 
HRC

WEDA L range

The WEDA slurry pumps are the toughest, and have the largest apertures to facilitate handling of slurry with the most challenging solids.

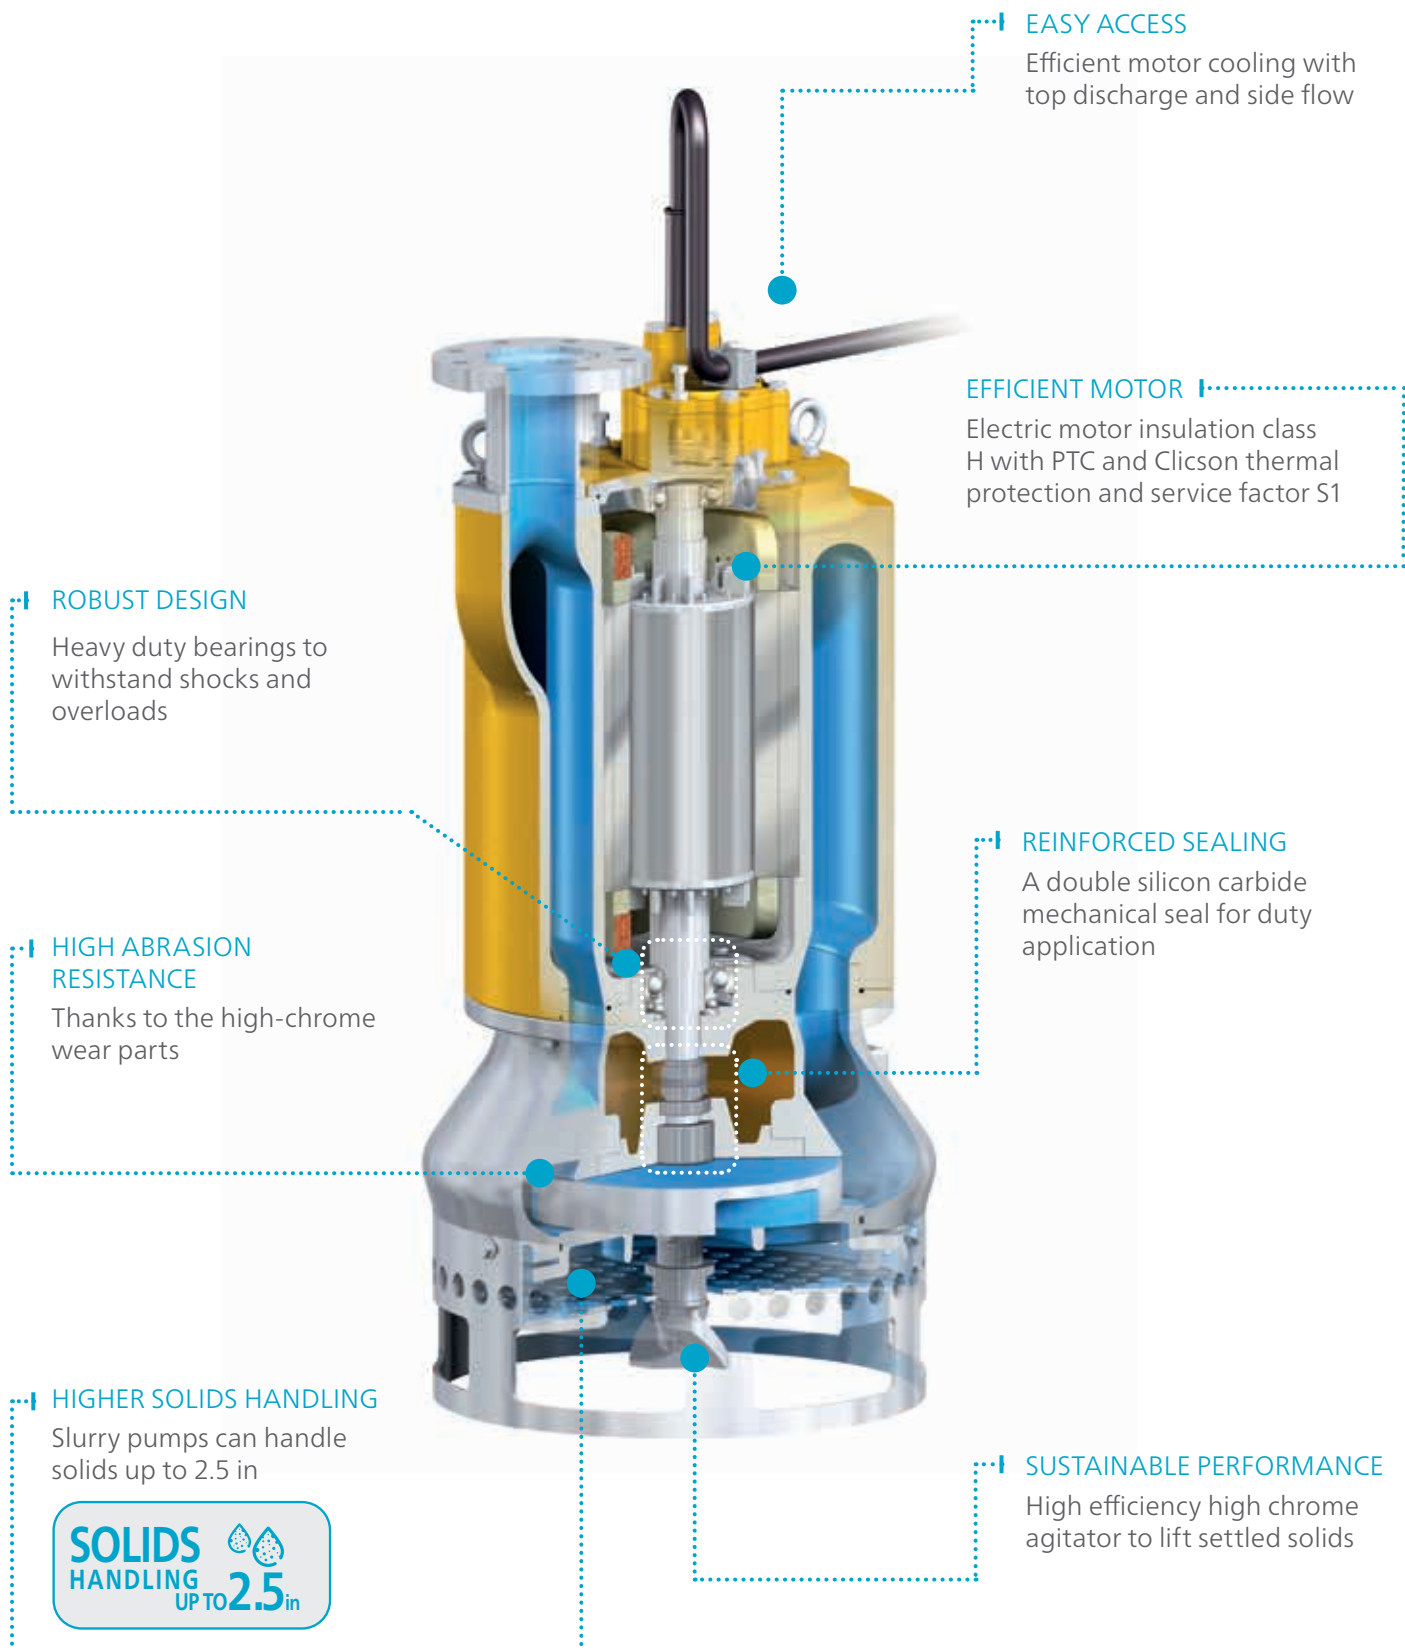

Tough environments demand tough pumps

The unique construction of the WEDA pumps provides high corrosion resistance in a wide range of applications.



WEDA D range


Technical data



		WEDA D04N	WEDA D048N	WEDA D08N	WEDA D10N		WEDA D30L		WEDA D30N		WEDA D40N
Specifications		1ph	1ph	1ph	1ph	3ph	1ph	3ph	1ph	3ph	3ph
Max. head	ft	39	39	50	52	52	62	58	90	85	66
Max. flow	gpm	60	42	70	130	130	380	370	210	200	400
	m ³ /h	14	9.5	16	30	30	86	84	48	45	90
Shaft speed	r.p.m.	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Rated output	HP	0.5	0.5	1	1.5	1.5	3.0	3.0	3.0	3.0	4.3
Max. power input	kW	0.65	0.65	1.2	1.6	1.2	3.1	2.8	3.1	2.8	3.8
Discharge connection	inch	2"	1"	2"	2"	2"	3"	3"	3"	3"	3"
Max. solids handling size	inch	0.3"	0.18"	0.3"	0.16"	0.16"	0.27"	0.27"	0.27"	0.27"	0.27"
Weight and dimensions											
Weight	lbs	20	21	28	28	28	45	45	45	45	56
Height	inch	13.4	16.4	14.1	18.5	18.5	20.6	20.6	20.6	20.6	20.6
Width	inch	7.2	8.7	7.3	8.8	8.8	11.4	11.4	11.4	11.4	11.4
Diameter	inch	7.2	8.7	7.3	7.3	7.3	8.7	8.7	8.7	8.7	8.7


Typical applications

- General construction
- Ground water
- Raw water
- Construction sites

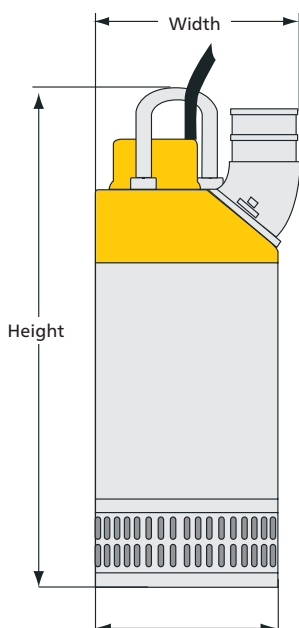


Performance curves


 **WEDA D04N**

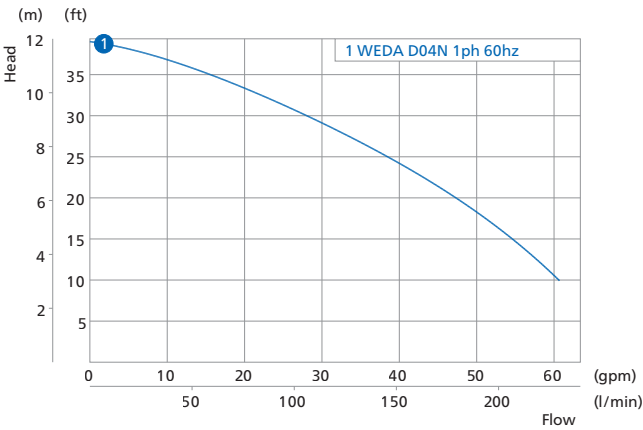


 **WEDA D04BN**

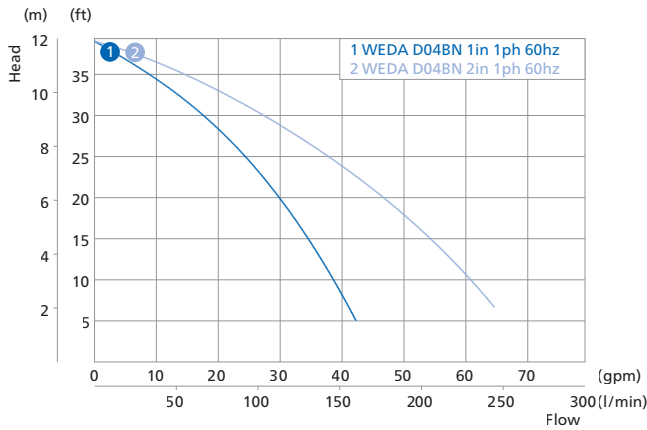


 **WEDA D08N**

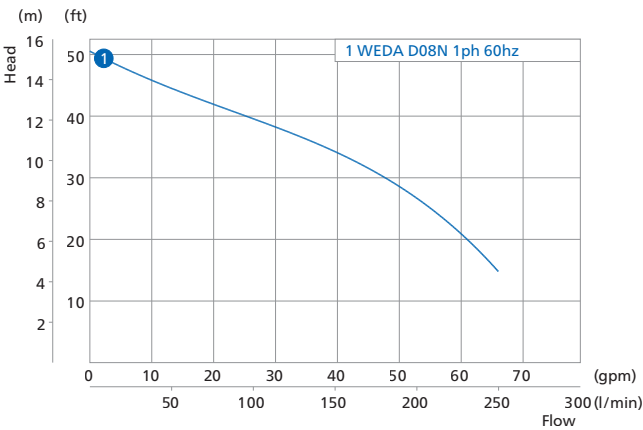


 **WEDA D10N**

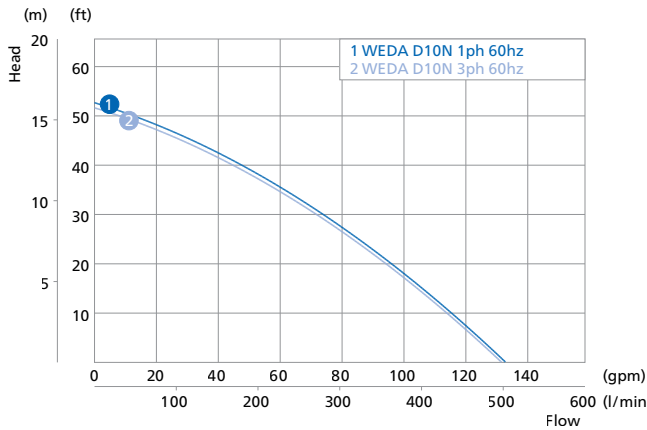

 **WEDA D30L, D30N**

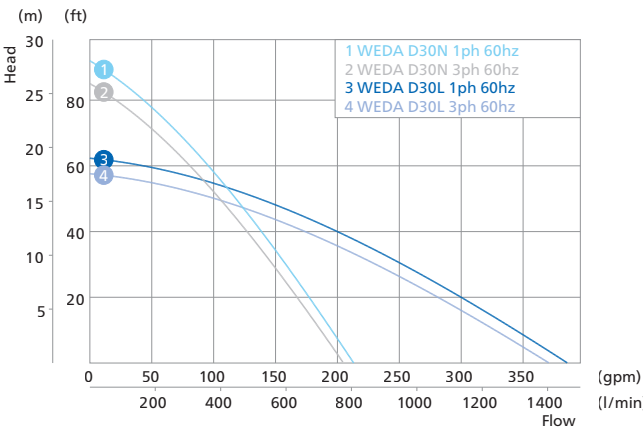

 **WEDA D40N**

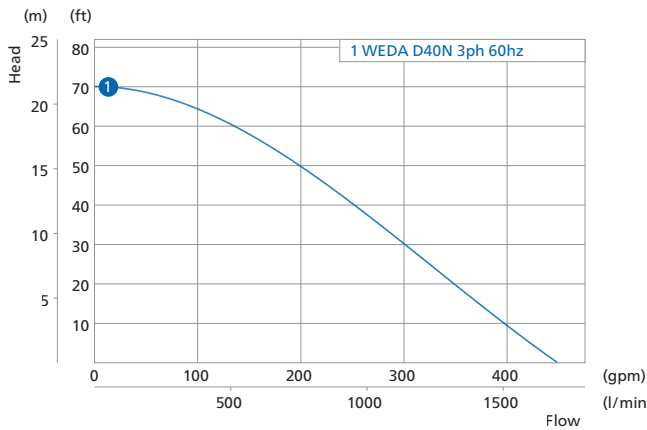

WEDA D range


Technical data



		WEDA D50N	WEDA D50H	WEDA D60N	WEDA D60H	WEDA D60SH	WEDA D70L	WEDA D70H	WEDA D80N	WEDA D80H	WEDA D90L	WEDA D90H	WEDA D100N
Specifications		3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph
Max. head	ft	83	135	100	170	250	130	205	145	240	140	325	115
Max. flow	gpm	620	310	700	340	260	1200	650	1600	750	1700	600	6000
	m ³ /h	141	70	159	77	59	273	148	363	170	386	136	1363
Shaft speed	r.p.m.	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	1750
Rated output	HP	8.5	8.5	11.5	11.5	11.5	18	18	31	31	40	40	90
Max. power input	kW	8.3	8.3	9.9	9.9	9.9	17	17	26	26	33	33	80
Discharge connection	inch	4"	3"	4"	3"	3"	6"	4"	6"	4"	6"	4"	10"
Max. solids handling size	inch	0.31"	0.31"	0.31"	0.31"	0.31"	0.39"	0.39"	0.47"	0.47"	0.27"	0.27"	0.47"
Weight and dimensions													
Weight	lbs	122	122	136	136	138	244	244	390	390	400	400	1133
Height	inch	28.3	28.3	29.9	29.9	29.9	37.1	37.1	38.6	38.6	43.3	43.3	55.5
Width	inch	13	11.9	13	11.9	11.9	16.4	15.5	27.2	26.2	18.9	18.9	25.5
Diameter	inch	10.9	10.9	10.9	10.9	10.9	14.6	14.6	20.9	20.9	15.8	15.8	23.6


Typical applications

- General dewatering
- Ground water
- Raw water
- Construction sites

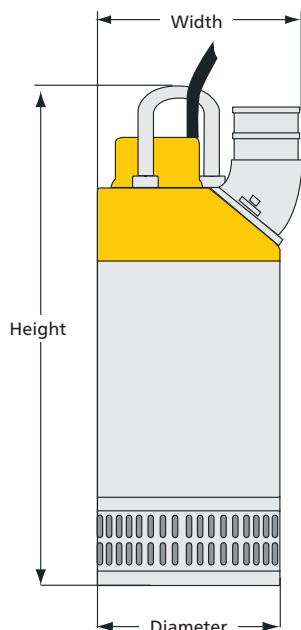


Performance curves


 WEDA D50N, D50H

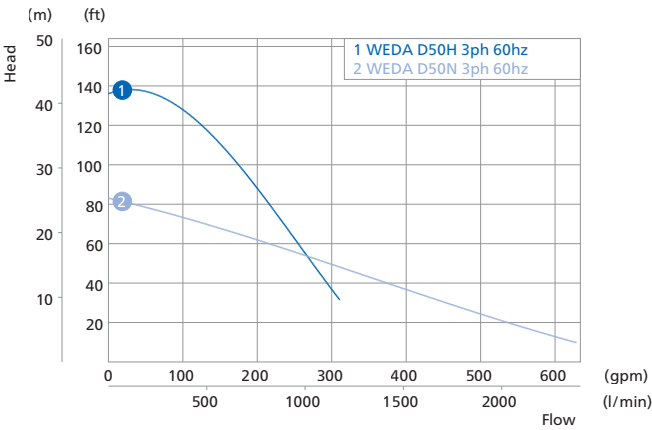


 WEDA D60N, D60H, D60SH

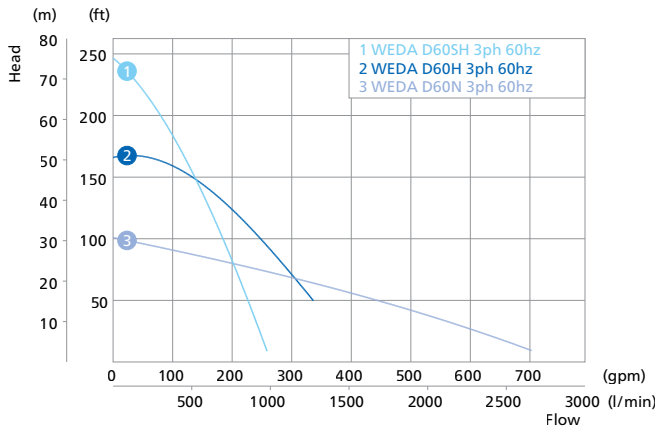


 WEDA D70L, D70H

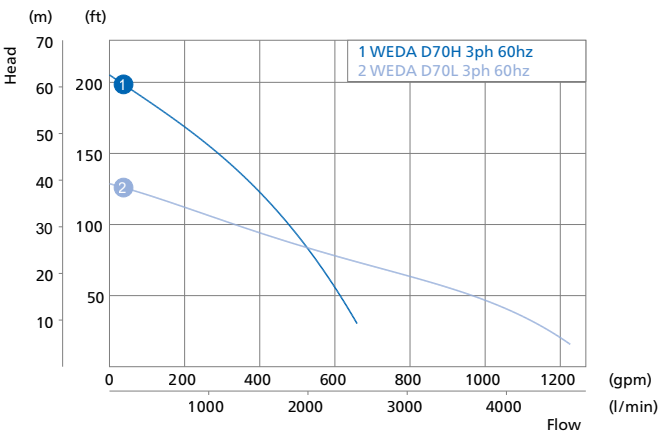


 WEDA D80N, D80H

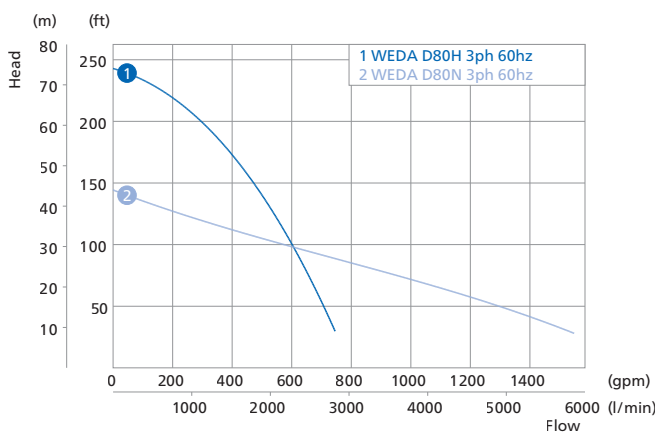

 WEDA D90L, D90H

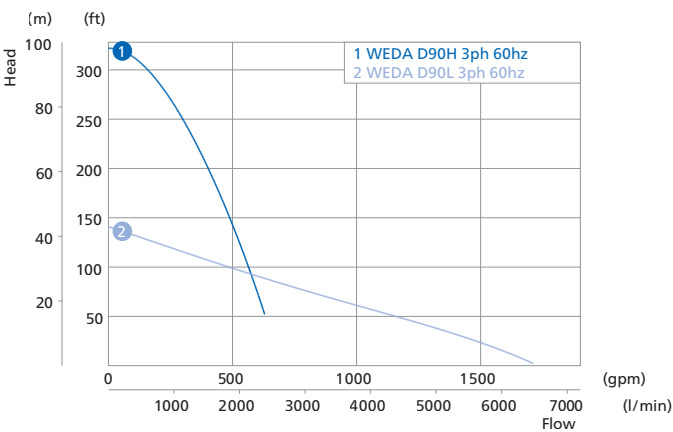

 WEDA D100N

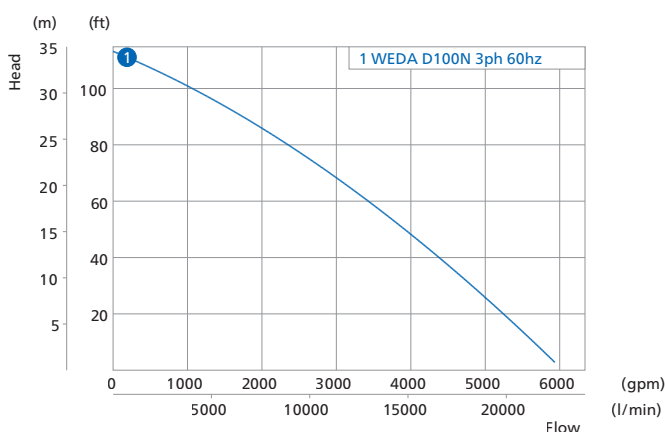


WEDA S range

Technical data



		WEDA S04N	WEDA S08N	WEDA S30N		WEDA S50N	WEDA S60N
Specifications		1ph	1ph	1ph	3ph	3ph	3ph
Max. head	ft	33	48	52	58	90	100
Max. flow	gpm	60	70	225	250	370	420
	m ³ /h	14	16	51	57	84	95
Shaft speed	r.p.m.	3500	3500	3500	3500	3500	3500
Rated output	HP	0.5	1.0	3.0	4.0	7.0	9.3
Max. power input	kW	0.65	1.2	2.9	3.3	5.6	8.2
Discharge connection	inch	2"	2"	3"	3"	4"	4"
Max. solids handling size	inch	1"	1"	2"	2"	2"	2"
Weight and dimensions							
Weight	lbs	22	29	55	55	132	144
Height	inch	14.7	16.4	24.3	24.3	31.9	34.2
Width	inch	10.9	10.9	12.8	12.8	17.7	17.7
Diameter	inch	9.5	9.5	9.8	9.8	13.8	13.8

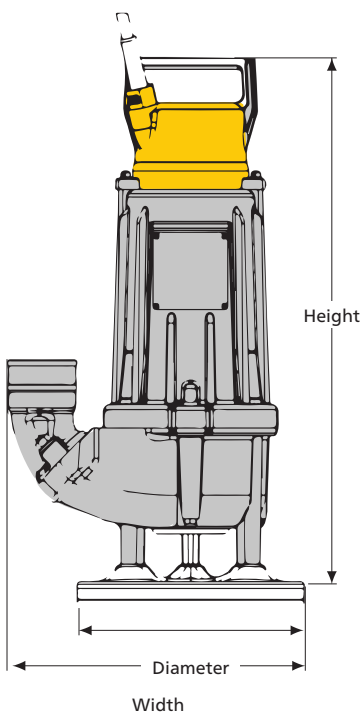


Typical applications

- Water containing mud
- Sludge or light slurry
- Tank clean-out
- Trench and pond cleaning
- Mining




Performance curves


WEDA S04N

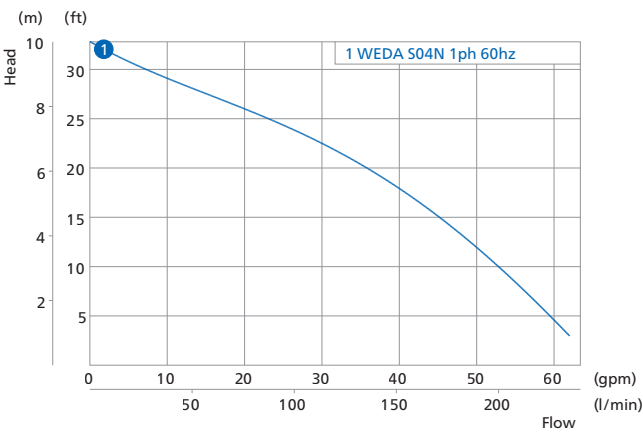


WEDA S08N

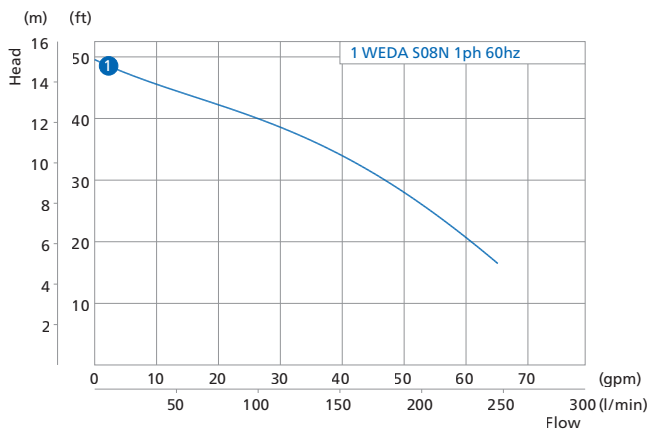


WEDA S30N

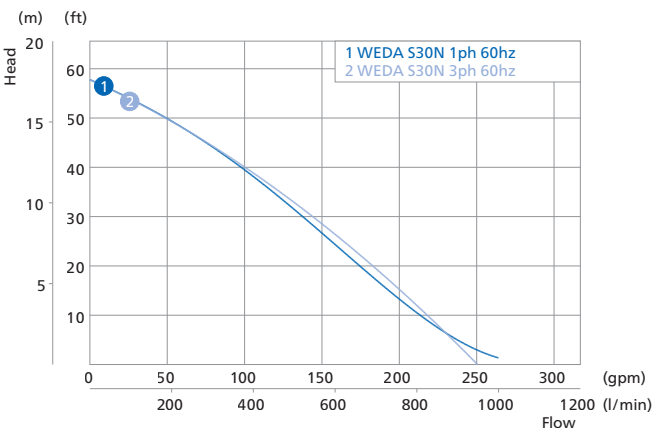

WEDA S50N

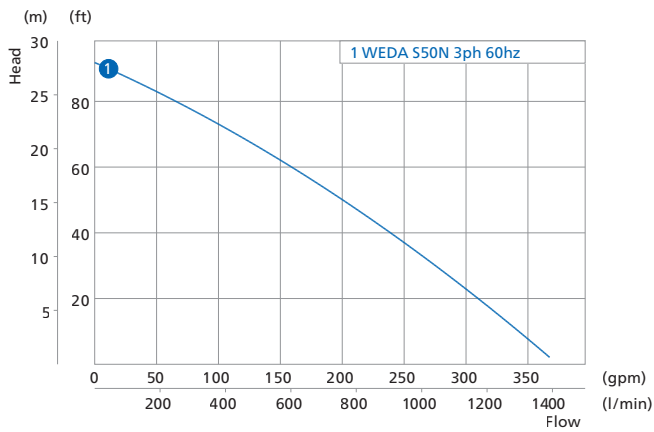

WEDA S60N

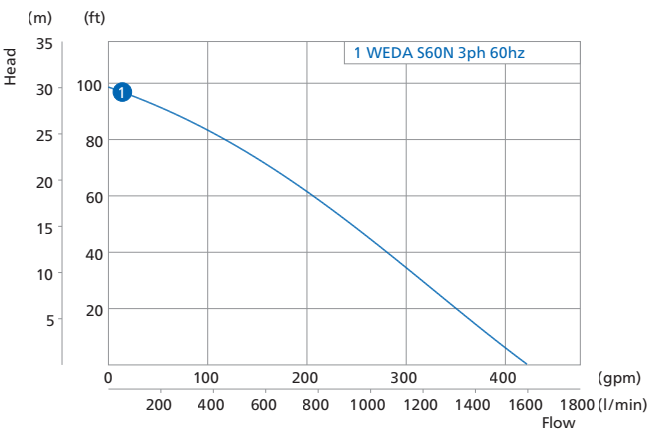

WEDA L range


Technical data



		WEDA L40N	WEDA L50N	WEDA L60N	WEDA L70N	WEDA L80N	WEDA L95N	WEDA L100N	WEDA L110N
Specifications		3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph
Max. head	ft	47	60	75	80	100	170	115	130
Max. flow	gpm	220	350	480	530	800	1200	2500	2200
	m ³ /h	50	79	109	120	182	273	568	500
Shaft speed	r.p.m.	1750	1750	1750	1750	1750	1750	1150	1750
Rated output	HP	5.0	7.4	12.0	14.8	20	50	60	100
Max. power input	kW	4.5	6.8	10.4	12.8	16.1	40	49	80
Discharge connection	inch	3"	4"	4"	4"	4"	4"	6"	6"
Max. solids handling size	inch	0.8"	1"	1"	1"	1"	1.4"	2.4"	2.4"
Weight and dimensions									
Weight	lbs	411	573	573	595	689	1667	2233	2378
Height	in	31	36	36	36	42.5	63.2	63.2	63.2
Width	in	15	17	17	17	22.8	36.8	36.8	36.8
Diameter	in	13	16	16	16	19.5	21.5	21.5	21.5


Typical applications

- Abrasive media with high solids content
- Dredging
- Quarries
- Settling ponds

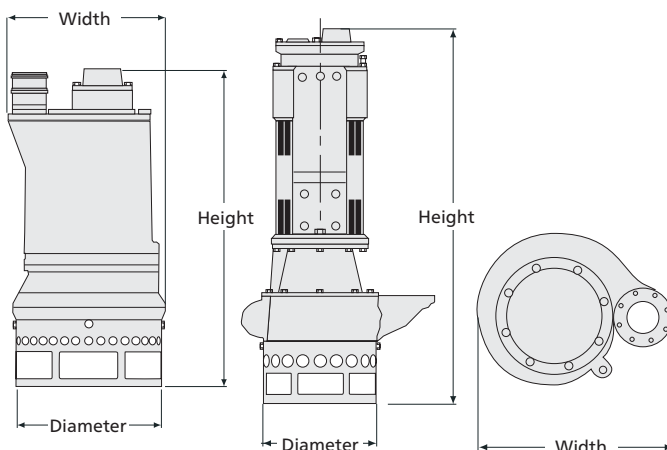


Performance curves


 **WEDA L40N**

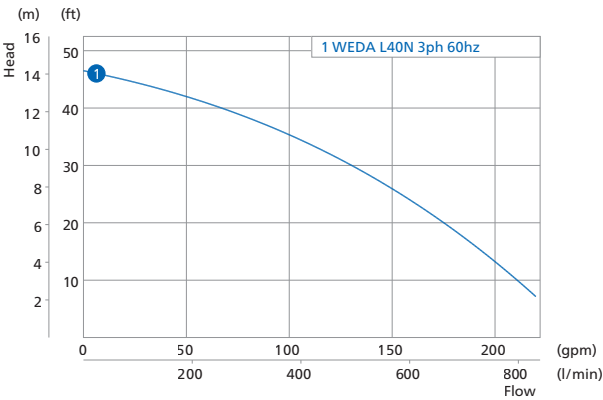


 **WEDA L50N**

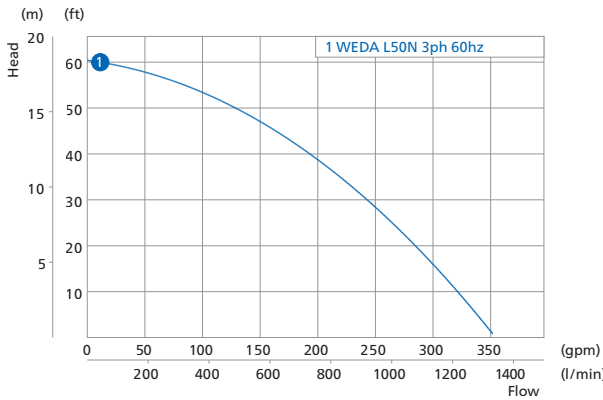


 **WEDA L60N**

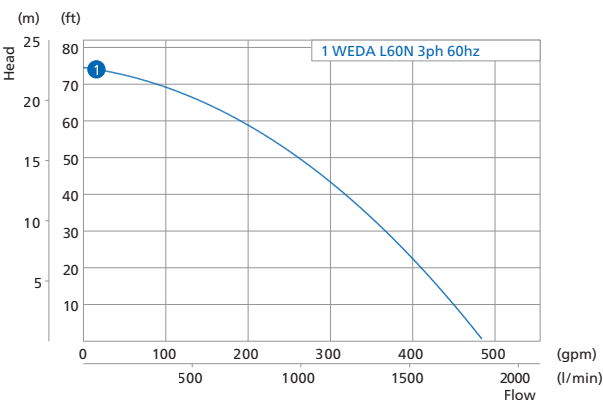


 **WEDA L70N**

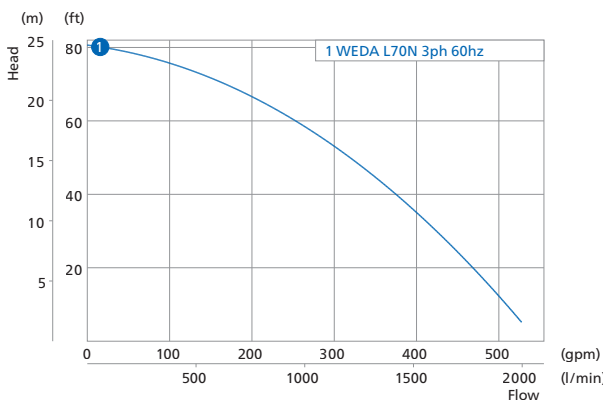


 **WEDA L80N**

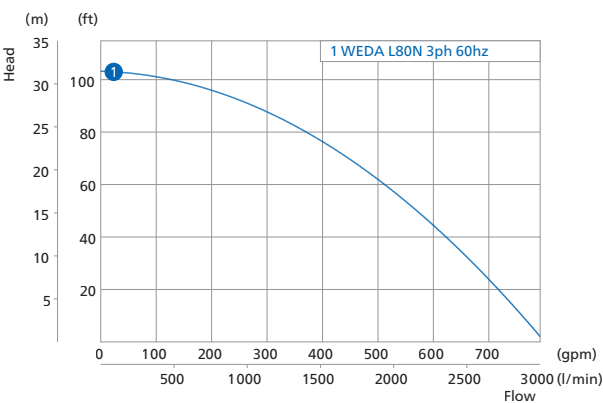


 **WEDA L95N**

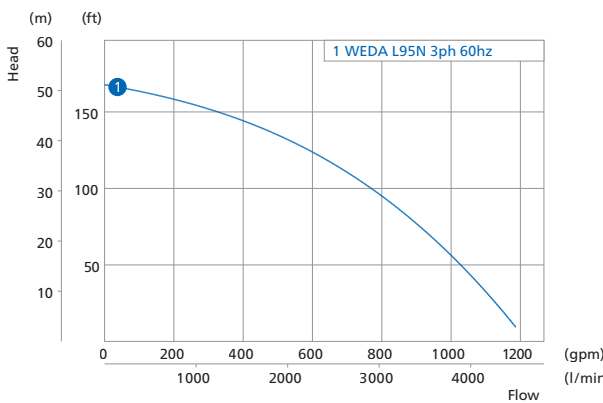

 **WEDA L100N**

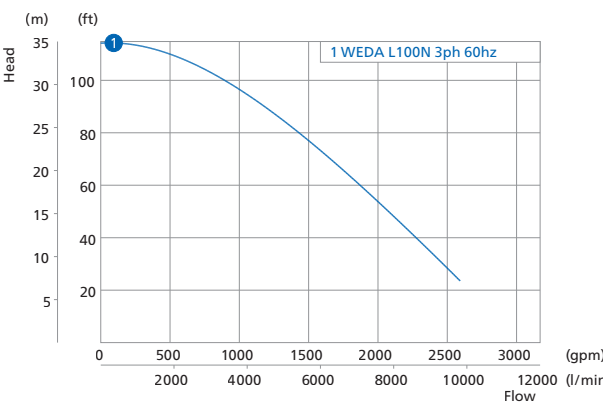

 **WEDA L110N**

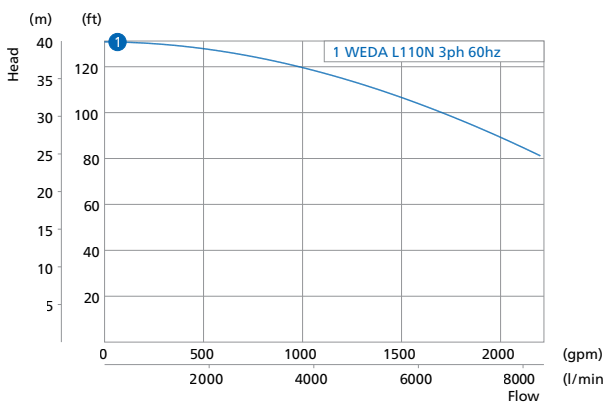

Accessories

Discharge connections

We understand that you will have preferred equipment connections, so we offer four types. All can be mounted in either a vertical or horizontal position.

- Hose



- Storz



- ISO-G



- NPT



Slim Adapter

For lowering pumps in narrow pipes and manholes D50H, D60H, D70H, D90H only



Raft

For easy floatation of pump with fluctuating water levels. Strainer option available



Level regulators

For easy control of water level by automatic pump switch-on/-off:



- Float switch

Zinc anodes

Specifically required for pumping water with a high concentration of salts such as sea water, brine, etc.



Low suction collar

To easily drain the water level down to the floor.

Epoxy coating

For protecting pumps in highly acidic media.

Service kits

Seal kit

The seal kit is the proper selection of high quality components for a mechanical seal change to ensure trouble-free operation after servicing.

- O-ring kit
- Mechanical shaft seal



Instant service pack

The instant service pack is a preassembled, tested and ready-to-use seal system containing the mechanical shaft seals, bearings, gaskets and oil to ensure trouble-free operation. It offers a quick onsite repair option due to ease of installation and therefore reduces the machine downtime cost.



Wear part kit

The wear part kit is a typical selection of components to bring the pump performance back to factory standard. The ideal solution for a machine overhaul or refurbishment.

- Impeller
- Wear plate
- Diffuser
- Impeller nut




**Built better.
Built to resist and perform**


DIP pneumatic pump

A pneumatic pump is a great choice when failure is not an option. They're easy to use, safe and can handle almost anything you throw at them.

The DIP centrifugal pumps can be made to suit several operations. With a simple change of impeller and intake ring you can adjust to the desired capacity and head. That means you get a three-in-one solution. The DIP is designed to handle relatively clean low-viscosity liquids such as water and cooling fluids.

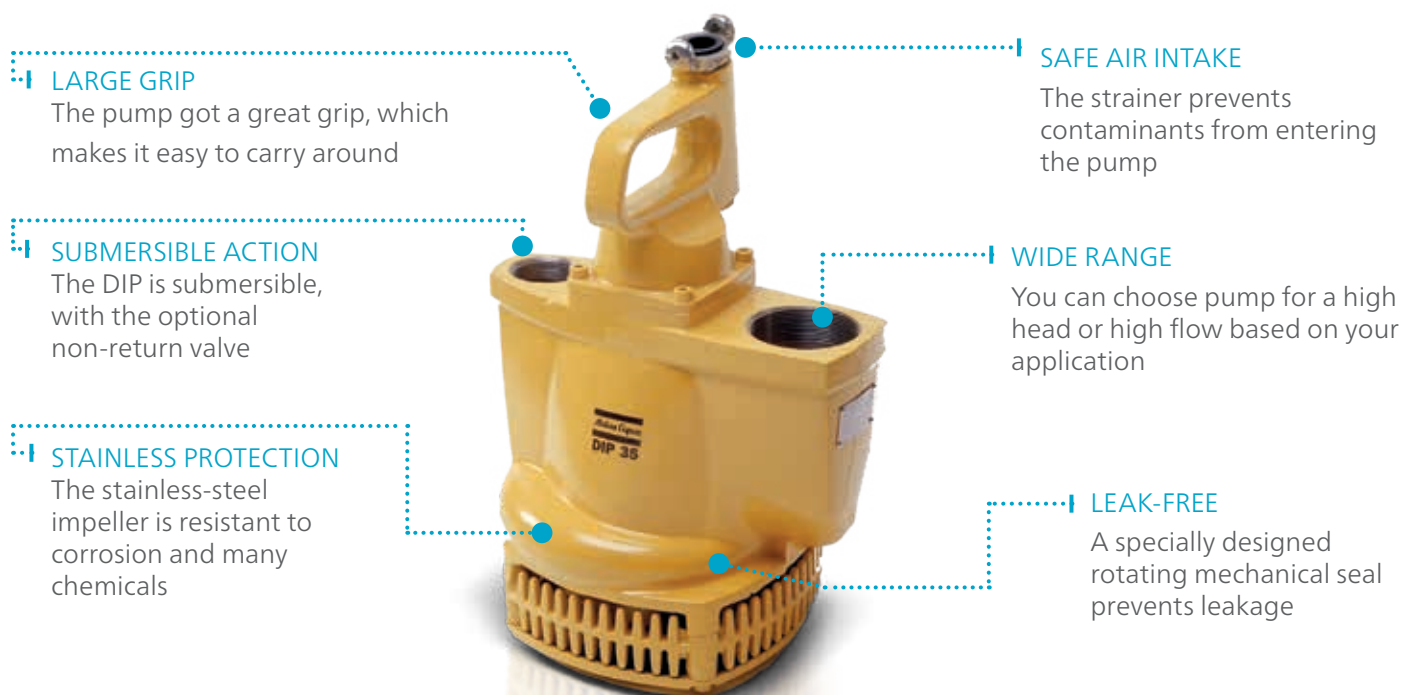

Flow chart

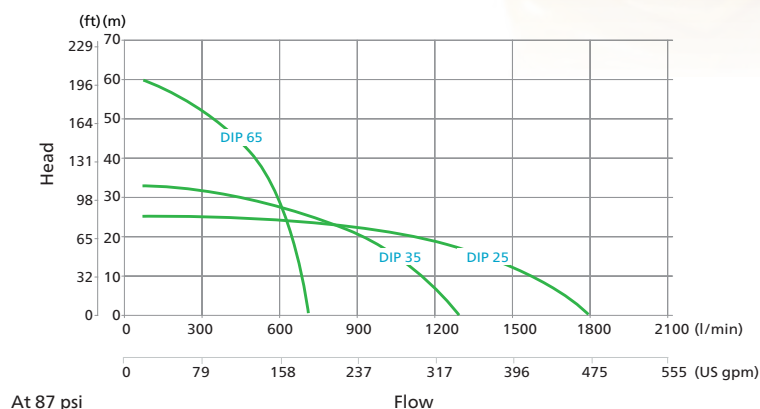

Specifications			DIP 25	DIP 35	DIP 65
Max. head		feet	82	115	194
Max. flow		US GPM	444	349	174
Max. air requirements		US GPM	1110	1110	1110
Connections	Fluid outlet	in	G 2 1/2	G 2 1/2	G 2 1/2
	Air inlet	in	G 3/4	G 3/4	G 3/4
	Air outlet	in	G 1 1/2	G 1 1/2	G 1 1/2
Weight and dimensions					
Weight		lb	51	51	51
Length		in	0.77	0.77	0.77
Width		in	0.94	0.94	0.94
Height		in	1.42	1.42	1.42

DOP pneumatic pump

When the going gets tough, the tough get a DOP diaphragm pump. They are designed for the most polluted and viscous media, as well as highly abrasive and flammable fluids.

EASY TO HANDLE

It only takes one person to handle the DOP

SAFE INTAKE

The air intake with strainer prevents contaminants from entering the pump via the air

SELF-PRIMING

Reduces unnecessary handling in rough environments

REACH THE CORNERS

Thanks to the pivoting intake coupling together with an optional suction hose

SUBMERSIBLE

The built-in non-return valve makes the pump submersible and independent of orientation; add a silencer for lower noise levels

LIFT MORE

The DOP can be connected in series to increase the lifting capacity, or "head"

PIVOTING CONNECTION


Reduces stress on the hose

STABLE OPERATIONS

The strainer at the base prevents particles larger than 30 mm from passing through the pump



Flow chart

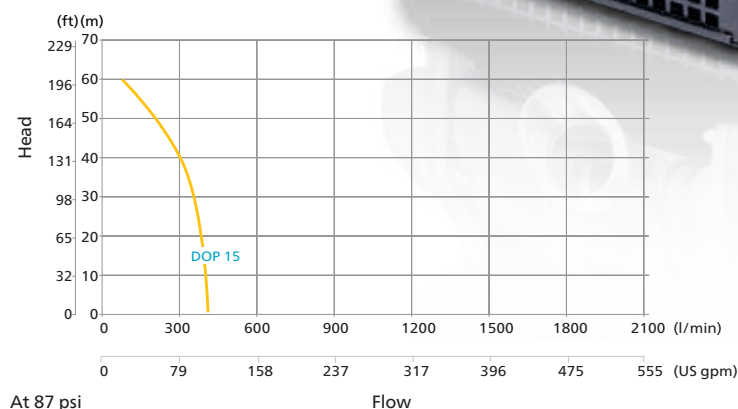

Specifications			DOP 15N	DOP 15F
Max. head		feet	194	194
Max. flow		US GPM	111	111
Max. air requirements		US GPM	539	539
Connections	Fluid outlet	in	G 2 1/2	G 2 1/2
	Air inlet	in	G 3/4	G 3/4
Weight and dimensions				
Weight		lb	68	68
Length		in	1.28	1.28
Width		in	1.08	1.08
Height		in	1.92	1.92

Product portfolio

GENERATORS

PORTABLE
1,6–12 kVA

stageV



MOBILE
9–1250* kVA

stageV




INDUSTRIAL
10–1420* kVA



LARGE POWER
800–1450 kVA

stageV



*Multiple configurations available to produce power for any size application


DEWATERING PUMPS

ELECTRIC SUBMERSIBLE
250–16.200 l/min




SURFACE PUMPS
833–23.300 l/min

stageV



Diesel and electric options available

ENERGY STORAGE SYSTEMS

ZENERGIZE
45–1000 kVA




LIGHT TOWERS

DIESEL

stageV



BATTERY




ELECTRIC





AIR COMPRESSORS AND HANDHELD TOOLS

AIR COMPRESSORS
1–116 m³/min
7–345 bar

stageV



HANDHELD TOOLS
Pneumatic
Hydraulic
Petrol engine driven



ONLINE SOLUTIONS


SHOP ONLINE PARTS ONLINE

Change parts online to spare parts for power equipment. We handle your orders 24 hours a day.



POWER CONNECT

Scan the QR code on your machine, and go to the QR Connect Portal to find all the information about your machine.




LIGHT THE POWER YOUR SIZING TOOL

A useful calculator to help you choose the best solution for your power and light needs

LightThe Power

FLEETLINK

Intelligent telematics system that helps optimize fleet usage and reduce maintenance, ultimately saving time and cutting operating costs.




Atlas Copco
Power And Flow division
atlascopco.com